

VERTICAL FEED MIXERS DOUBLE AUGERS SD160

SD160

About Product


You can make your choice according to your terrain conditions with single axle or double axle options and you can maneuver easily. By using our gearbox brand which we produce it at our manufacturing it provides a fast feed mixing speed and result the opportunity to unload the feed without leaving it inside the wagon. By using the remote control, it provides comfortable and opportunities usage than tractors with cabin.

Optional Features

- ▶ Magnet
- ▶ Electric Motor 55 Kw 1000 Rpm
- ▶ Weighing System
- ▶ Hydraulic jack
- ▶ Top Supplement
- ▶ Hydraulically assisted compactor ax
- ▶ Electric remote control

CAPACITY	MINIMUM POWER	AUGER SPEED	NUMBER OF BLADES
16m³	110hp	1-24,39 Rpm 2-43,90 Rpm	22+2

Pto speed 540 rpm / calculated according minute.

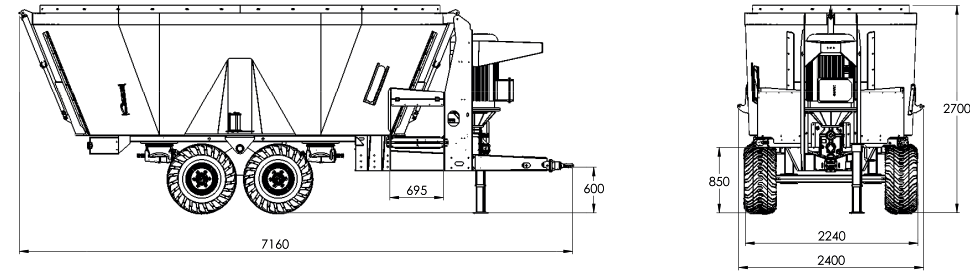

STANDARD FEATURES	
CAPACITY	16m ³
MIXING SYSTEM	Double Auger
NUMBER OF BLADES	22+2
MIN. POWER REQUIREMENT	110 HP
PTO TRANSFER	540 Rpm
TRANSMISSION TYPE	Planet
AUGER SPEED	1-24,39 Rpm 2-43,90 Rpm
WHEEL SIZE	400x60x15.5
MANUAL GEAR BOX	Standard
FEED DISCHARGE DIRECTION	Standard (Front)
JACK	Mechanic
CONVEYOR BELT	Standard
JAMMING AX	Manuel
EXCHANGE RATIOS	12.3

STANDARD FEATURES	
LENGHT	7175 mm
HEIGHT	2700 mm
WIDHT	2230 mm
BODY SHEET	6 mm
BASE PLATE	20 mm
EMPTY WEIGHT	5530 kg
FULL WEIGHT	10120 kg

Depending on added options, the specified features can be change.

