

MANURE SPREADER MACHINES KG20

CAPACITY

20 m³

MINIMUM POWER

110 hp

AUGER SPEED


391,3 Rpm

WHEEL SIZE

23x1x26

Features	Values
CAPACITY	20 m ³
MIN. POWER REQUIREMENT	110 HP
AUGER SYSTEM	2 Ad
AUGER SPEED	391,3 Rpm
NUMBER OF BLADES	48 Ad
WHEEL SIZE	23x1x26
NUMBER OF AXLES	Single
SPREADING WIDTH	20 m
PTO SPEED	540
LENGHT	8545 mm
HEIGHT	3035 mm
WIDHT	2795 mm
BODY SHEET	4 mm
BASE PLATE	6 mm

● The specified features vary depending on the added options.

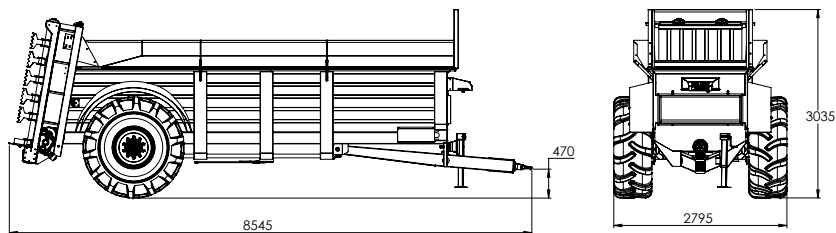

About Product

With its unique design, KG20 ensures controlled and efficient manure spreading over large areas. Thanks to its adjustable valve, the amount of manure applied per decare can be easily set. Its wide tires allow smooth operation on challenging terrain, while the special spreading system and reinforced chain distribute different types of organic manure evenly.

