
Manure Spreader


Machines KG20

CAPACITY	MIN. POWER	AUGER SPEED	TIRE SIZE
20 m³	110 hp	540 Rpm	23,1 - 26

Specifications	Values
Capacity	20 m³
Minimum Power Requirement	110 hp
Auger System	2 Ad
Auger Speed	540 Rpm
Tire Size	23,1-26
Axle Configuration	Tek
Spreading Width	10 m
PTO Speed	540
Number of Blades	60
Length	8692 mm
Width	2830 mm
Height	3128 mm
Body Sheet	4 mm
Base Sheet	3 mm

- Specifications may vary depending on the selected optional equipment.

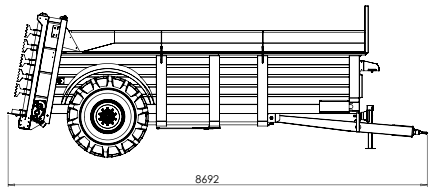



Product Overview

İzelmak KG20 Manure Spreader provides even and controlled manure distribution across large areas. Its adjustable valve allows precise control of the application rate. Wide tires and a reinforced chain ensure reliable operation on challenging terrain with various types of organic manure.



Optional equipment

- Ball hitch
- European-type hitch
- 650/70 R32 tyres
- Protective cover
- Hydraulic jack
- Wide-angle PTO shaft
- Air brake + parking brake
- Air brake + hydraulic brake + parking brake
- Hydraulic brake + parking brake